


Hush-Pro Fire Level 2 Mini I/O Module

Part No. **HP735**

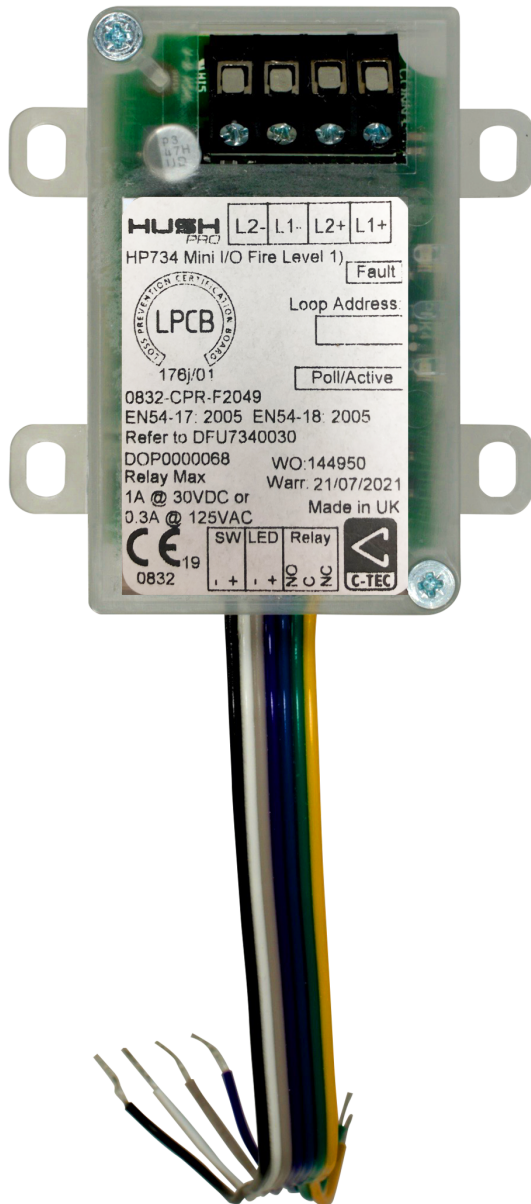

Overview

- A miniature I/O Module specifically designed for use with a Hush-Pro domestic fire alarm system.
- Can be used to (1) activate a third-party device when there is a Fire Level 2 Alarm on a Hush-Pro System and/or (2) to trigger a Fire Level 2 Alarm on a Hush-Pro system when a third-party device activates.
- Includes an onboard, bi-directional, short-circuit isolator, a monitored switch input, a changeover relay and fire

LED outputs.

- Supplied with a 7-way ribbon cable (150 mm length), 7-way terminal block, trigger resistor and EOL resistor.
- Measures 65mm x 60 mm x 20 mm so it can fit into equipment with limited space.
- HP734 Fire Level 1 Mini I/O units also available.



Technical Specifications

Approvals/certifications	Certified to EN54-17 & 18 by the LPCB
Compatibility	Designed to work with C-TEC's Hush-Pro Domestic Fire Alarm System.
Quiescent current	1mA.
Indicators	Active and Fault LEDs.
Product dimensions (mm)	65 mm x 60 mm x 20 mm (excluding terminal block & ribbon cable)
Construction & finish	Clear ABS polycarbonate enclosure.
IP Rating	IP40.
Operating conditions/temperature	-10°C to +55°C. Max relative humidity: 95%.