


# Strobe Driver Module

Part No. **SDM**

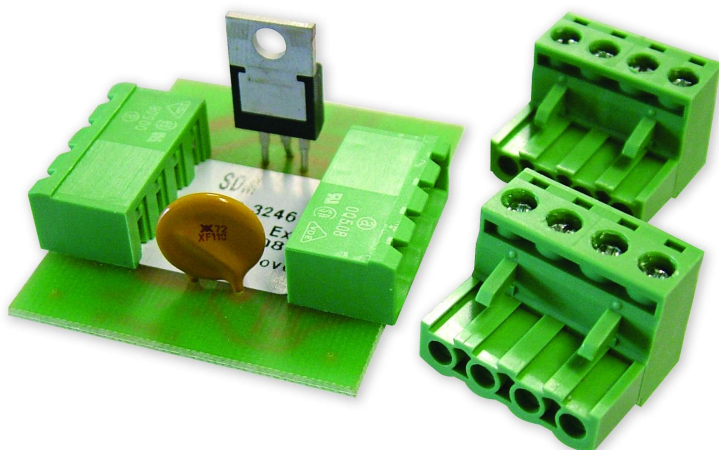

## Overview

- Used in conjunction with a compatible 12V DC strobe to provide visual indication of a ringing SigTEL Type A (fire telephone) or Type B (disabled refuge) outstation.
- Can also be used to trigger a compatible 12V DC sounder (max. peak output current of sounder must not exceed 1A).
- Power to operate the strobe or sounder must be derived from a separate 12V DC PSU.



## More Information

## Technical Specifications

Compatibility	C-TEC's SigTEL Emergency Voice Communication System.
Connections	12V PSU (+12V; 0V) and SigTEL line connections (L+; L-) via PL1; Strobe (ST+; ST-) and outstation connections (PH+; PH-) via PL2.
Product dimensions (mm)	TBC.
IP Rating	IP00.
Weight	TBC.